

Montag Mfg, Inc.

3816 461st Ave

Emmetsburg, IA 50536

Ph. (712)-852-4572

www.MONTAGMFG.com

Designed to Get the Job Done

GEN II

MonTag[®]

INTRODUCING THE NEXT GENERATION OF METERING SYSTEMS

Designed from the bottom up, the Gen II metering system has been the wish list for year's here at Montag Manufacturing. With its ability to add rows and configure drives you can now easily invest in a metering platform that can be adapted to your operation as it changes and evolves for years to come.


KEY FEATURES OF GEN II

- Dual Product with two 4.5 Ton Tanks, each with Scales
- Greater Performance and Accuracy
- VRT per Tank with on / off control of up to 4 Sections
- A Clean and Simple Modular Design
 - Add rows as you need them, 1 to 18
- Greater Serviceability
 - Easier to repair or replace parts
 - Easier to clean out at the end of the year
- 2" Hoses with NO Splitting and Joining of Hoses
- Designed to be more Corrosion Resistant by using stainless and composite materials





GEN II Designed to Get the Job Done

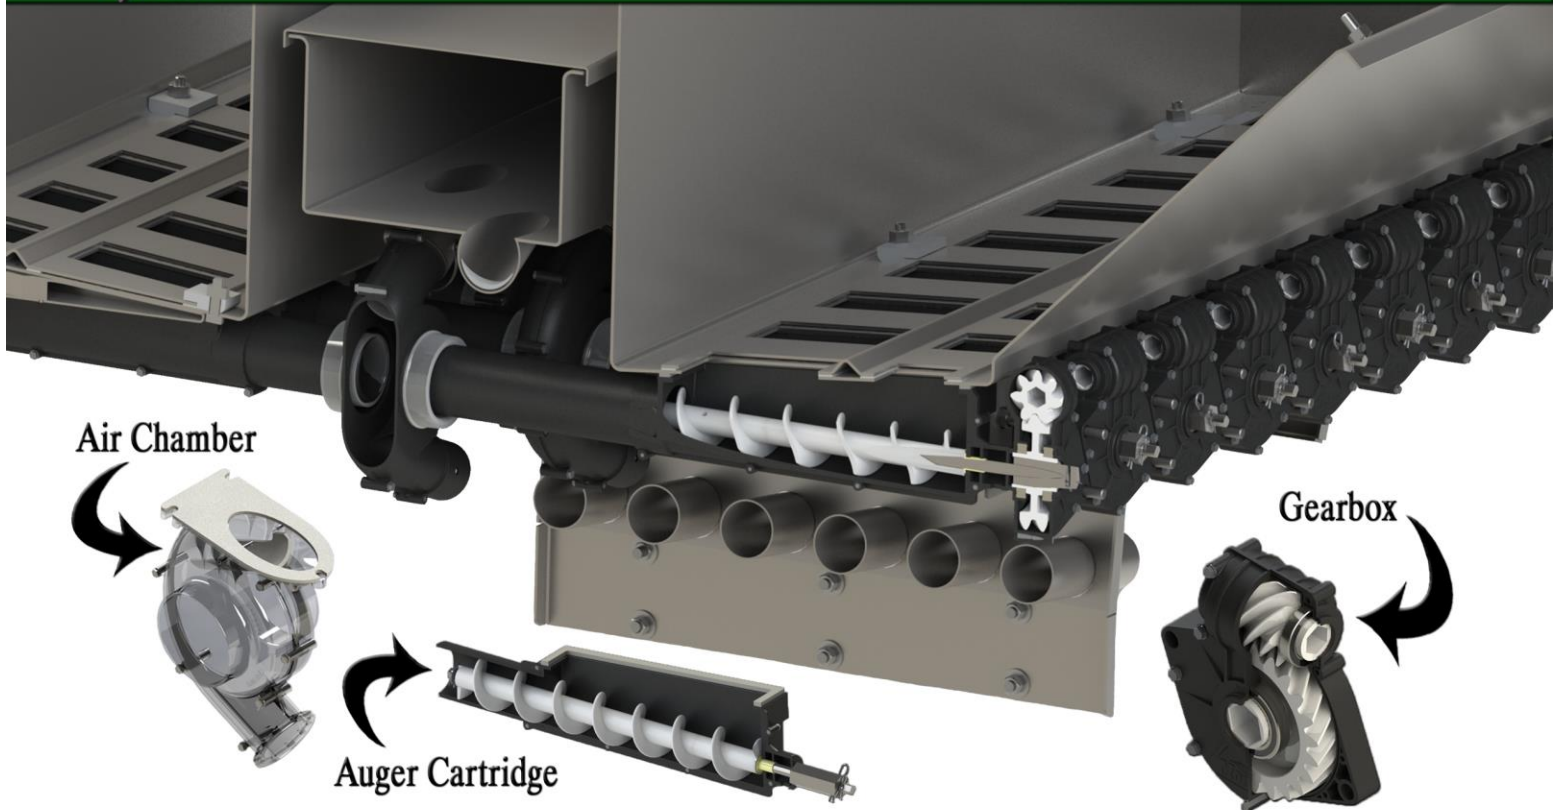

The Meter has a modular design so that rows can be easily added:

1. Attach an Air Chamber to the existing air plenum in the center of the meter
2. Slide an Auger Cartridge into the slot in the bottom of the metering system and into the opening in the Air Chamber
3. Attach a Gearbox and insert the drive shaft

VARIABLE RATE & SECTION CONTROL

The Montag GEN II metering system can variable rate (VRT) each tank separately . By also adding multiple drivers to the GEN II metering system, you can turn on and off up to 4 sections on your implement. Please note that you cannot change rates in individual sections. The rate will be set by the tank's rate setting at this time.

